
FR-MCP-G-I

ADDRESSABLE MANUAL CALL POINT

The FR-MCP-G-I Addressable call point is a non-coded, manual call point. It provides FARENHYT intelligent fire alarm control panels (FACP) with one addressable alarm initiating point. The FR-MCP-G-I is compatible with all Farenhyt Intelligent panels and will automatically operate in Intelligent Device Protocol (IDP).



LED STATUS (DUAL COLOR)

The LED status is controlled by fire panel and shows blinking GREEN each time the device is polled, or continuous RED to indicate fire.

MOUNTING ARRANGEMENTS

The FR-MCP-G-I panel will be installed as a flush mounted device in a normal internal environment. It is not intended for use in an externally exposed or hazardous location (refer to your supplier for product recommendations should these applications be involved).

COMPATIBILITY

FR-MCP-G-I is compatible with the following Honeywell Farenhyt Series FACPs:

- IFP-2100 / IFP-2100ECS / IFP-2100HV / IFP-2100ECSHV / IFP-2100HVB / IFP-2100ECSHVB
- IFP-75



FR-MCP-G-I

TECHNICAL SPECIFICATIONS

Dimensions: $89(w) \times 93(h) \times 59.5(d)$

Weight: 130g

Max Operating Current: 7.8 mA

Avg Operating Current: 385 µA

Operating Voltage: 24 VDC

Operating Temperature: 0°-49°C

Ingress Protection (IP) Rating: IP 24

Relative Humidity Range: 10% to 93% non-condensing


Construction Material: Durable Polycarbonate/ABS/PVC

MECHANICAL SPECIFICATIONS


CONNECTION DETAILS

DIMENSIONS

PUSH FIT CONNECTOR

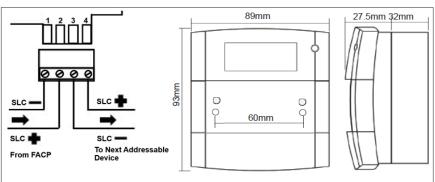

PRODUCT DESCRIPTION



AGENCY LISTINGS AND APPROVALS

- UL Listed
- FM Approved

PART NUMBER

ORDERING INFORMATION

FR-MCP-G-I	Addressable Break Glass Manual Call point	Ea.	IP24
OPTIONAL ACCESSORIES			
PS230	Pack of ten resettable elements		
MUS041W	Manual call point back box		
MUS156	Pack of ten glass elements		
SC070	Pack of 10 test keys		

Honeywell International (I) Pvt Ltd

Sector-36, Pace City-II Gurgaon - 122 004 Haryana, India



For more information

UOM IP RATING